


RPES-51.2V314Ah W2(IP65)

LiFePO4 Lithium Battery

Wheel-Mounted Model

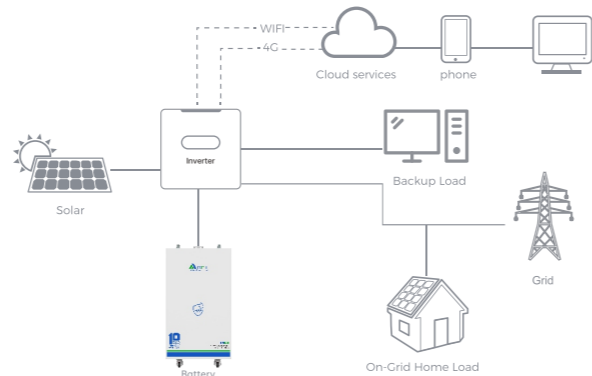

- 1 Switch
- 2 Positive Terminal
- 3 Negative Terminal
- 4 Wheel
- 5 RS485A
- 6 RS485B
- 7 CAN
- 8 RS232
- 9 Circuit Breaker
- 10 Metal Handle
- 11 Breaker

Model	RPES-51.2V314Ah-W2(IP65)
Rated Voltage	51.2V
Rated Capacity	314Ah
Rated Energy	16.08kWh
Output Voltage Range	43.2V~58.4V
Charging Voltage	57.6V~58.4V
Cut-off Voltage	43.2V
Max. Charging Current	150A
Recommended Charging Current	100A
Max. Discharging Current	150A
Efficiency	≥99%
Dimension L*W*H (mm)	550*520*250
Weight (kg)	≈130
Humidity	5%~95% Relative humidity
Charging Temperature	0°C~55°C
Discharging Temperature	-20°C~60°C
Storage Temperature	-10°C~30°C
Cycle Life	≥8000 times (0.2C, @25°C, 80%DOD)
Design Life	10 years
Warranty Life	10 years
IP Rating	IP 65

Application scenarios



Shenzhen Renergy Power Technology Co.,Ltd

+86 755 8992 2956

info@rpt-power.com

+86 755 8992 2558

www.rpt-power.com



Wandajie Industrial Park, No. 1-12, Jinlong Avenue, Pingshan District, Shenzhen, Guangdong, China, 518118